


# TA468



**Labels for Life.**

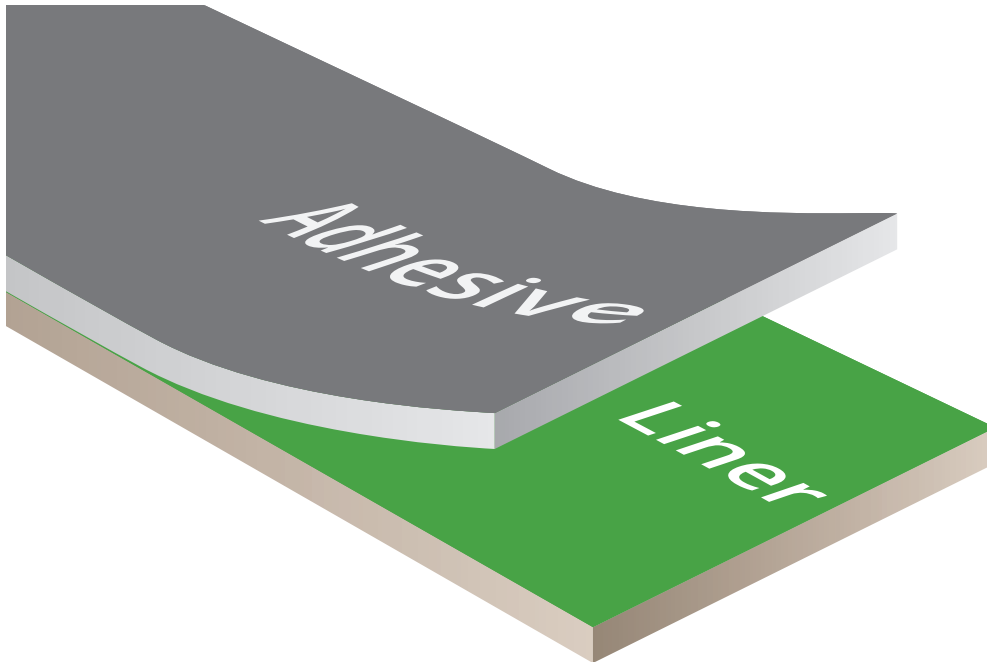

**Adhesive:** 5.2 mil clear high performance permanent pressure sensitive acrylic that is specifically designed for optimal adhesion and clarity. This material is designed to offer consistent performance even after exposure to humidity and hot/cold cycles.

**Release Liner:** Available with a 4.2 mil 58# polycoated kraft.

## Clear Transfer Adhesive Tape

TA468 is a permanent pressure sensitive adhesive that is specifically designed to offer high bond strength. Key features include: high shear strength, high temperature, harsh environment resistance, and extremely high clarity. When used in combination with the recommended IDENTCO material, it will meet the most demanding durable labeling requirements.

## Typical Applications

- Graphic overlays
- Membrane switches
- Durable applications

## Typical Industry Sectors

- Automotive
- Electronics
- Industrial




[www.identco.com](http://www.identco.com)


# TA468

Clear Transfer Adhesive Tape




Labels for Life.


 **Agency Recognitions**  
 UL-MH16225 (PGDQ2) in combination with certain Identco polycarbonate film


 **Adhesion**

72 hour RT @ 90° Peel			ABS	68 oz/in	748 N/m
Stainless Steel	118 oz/in	1298 N/m	Acrylic	67 oz/in	737 N/m
			Aluminum	115 oz/in	1265 N/m

 **Material Caliper**

Adhesive	.0052"	132.08μ
Liner	.0042"	106.68μ
<b>Total Material</b>	<b>.0094"</b>	<b>238.76μ</b>

 **Shelf Life**  
 Recommended Storage: 45-90 °F (7-32 °C) 20-75% R.H.  
 Shelf Life: 2 years @ recommended storage

 **Temperature Range**

Service Temperature: -40 °F to 302 °F (-40 °C to 150 °C)	• Short term (minutes/hours) 400 °F (204 °C)
Minimum Application Temperature: 50 °F (10 °C)	• Long term (days/weeks) 300 °F (140 °C)

 **Exterior Durability**  
 Testing is recommended in actual application.

 **Process Durability**  
 It is recommended that customers test this material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 07/12/2017.

**UNITED STATES HEADQUARTERS**

28164 W. Concrete Drive  
Ingleside, IL 60041  
Phone: +1 (815) 385 - 0011  
Fax +1 (815) 385 - 0359

**MEXICO MONTERREY**

Carr. a Laredo Km. 16.5 Interior  
14B, Col. Moisés Sáenz, 66613  
Apodaca, Nuevo Leon  
Phone: +52 (81) 8008 - 0438

**GERMANY FRANKFURT**

Güterbahnhofstrasse 3-7  
63450 Hanau  
Phone: +49 (6181) 440 830 - 0  
Fax: +49 (6181) 440 830 - 99

**PRC HONG KONG**

Unit 1708, 17/F, 9 Wing Hong St.  
Cheung Sha Wan, Kowloon  
Phone: +852 2959 2156  
Fax: +852 2959 2019

**MALAYSIA PENANG**

Suite 163E, Level 16, Room 1602  
Hunza Tower Gurney Paragon  
Jalan Kelawei, Georgetown  
10250 Penang  
Phone: +6012 466 - 0866