


# 3M 484L



**Labels for Life.**

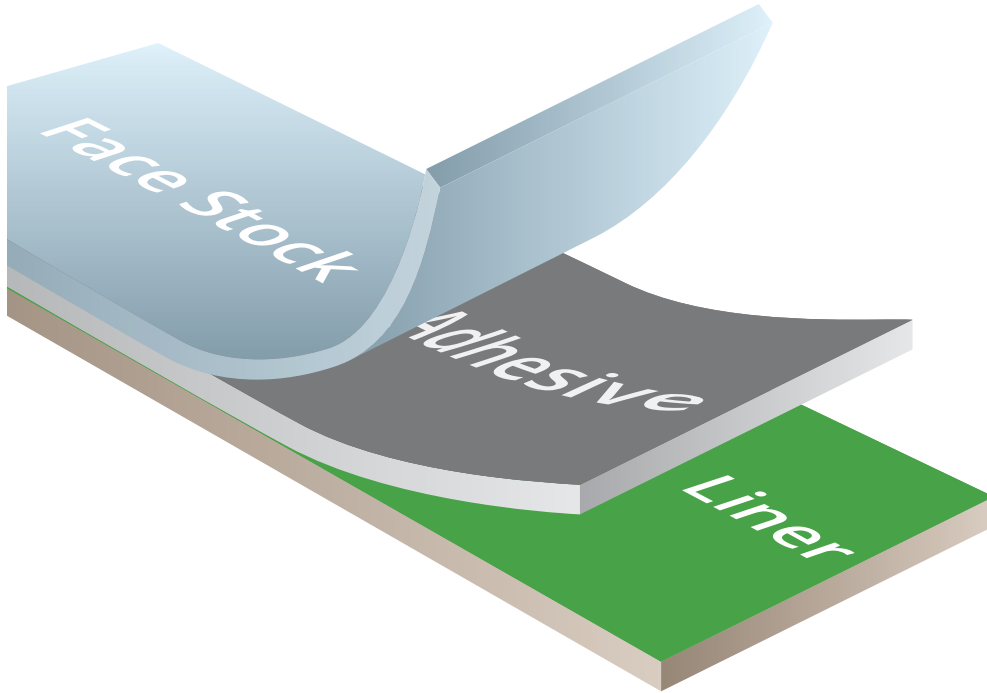

**Face Stock:** 5.6 mil electroplating & anodizing vinyl tape that is translucent yellow in color. It is specifically designed to be conformable and chemical and abrasion resistant.

**Adhesive:** 1.1 mil high-performance rubber-based adhesive.

**Liner:** 6.2 mil 3M liner that is designed to offer excellent performance and allow for easy handling during the application process.

## Vinyl Electroplating & Anodizing Tape

3M 484L is designed to be a high-performance vinyl masking tape for electroplating and anodizing. Key features include: indoor applications, conformable, moisture resistant, and excellent chemical and abrasion resistance. The material will meet the most demanding durable labeling and die-cutting requirements.

## Typical Applications

Masking surfaces during electroplating and anodizing

## Typical Industry Sectors

Automotive  
Electronics  
Industrial



[www.identco.com](http://www.identco.com)

# 3M 484L

## Vinyl Electroplating & Anodizing Tape



Labels for Life.



### Agency Recognitions

Agency testing can be completed upon request.



### Adhesion

Stainless Steel	22 oz/in	242 N/m
Tensile Strength	23 lbs/in	
Elongation at Break	220%	



### Material Caliper

Face Stock	.0056"	142.24μ	Liner	.0062"	157.48μ
Adhesive	.0011"	27.94μ	Total Material	.0129"	327.66μ



### Exterior Durability

Recommended: Indoor use.  
Testing recommended in actual application.



### Temperature Range

Service Temperature: -40 °F to 170 °F (-40 °C to 77 °C)



### Shelf Life

Recommended Storage: 45-90 °F (7-32 °C) 20-75%R.H.  
Shelf Life: 2 years @ recommended storage



### Recommended Printing

Non-printable material.



### Chemical Resistance

Testing can be completed upon request.



### Process Durability

It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 06/27/18.

#### UNITED STATES HEADQUARTERS

28164 W. Concrete Drive,  
Ingleside, IL 60041 USA  
Phone: +1 (815) 385 - 0011  
Fax + (815) 385 - 0359

#### MEXICO MONTERREY

Carretera a Laredo KM 16.5  
Interior 14B Col. Moises Saenz  
Apodaca, Nuevo Leon CP 66613  
Phone: +51 (81) 8008 - 0438

#### EUROPE GERMANY

Güterbahnhofstraße 3-7  
63450 Hanau  
Phone: +49 (6181) 440 830 - 0  
Fax: +49 (6181) 440 830 - 99

#### ASIA HONG KONG

Unit 1708, 17/F, 9 Wing Hong St.  
Cheung Sha Wan, Kowloon  
Phone: +852 2959 2156  
Fax: +852 2959 2019