


TA5305



Labels for Life.

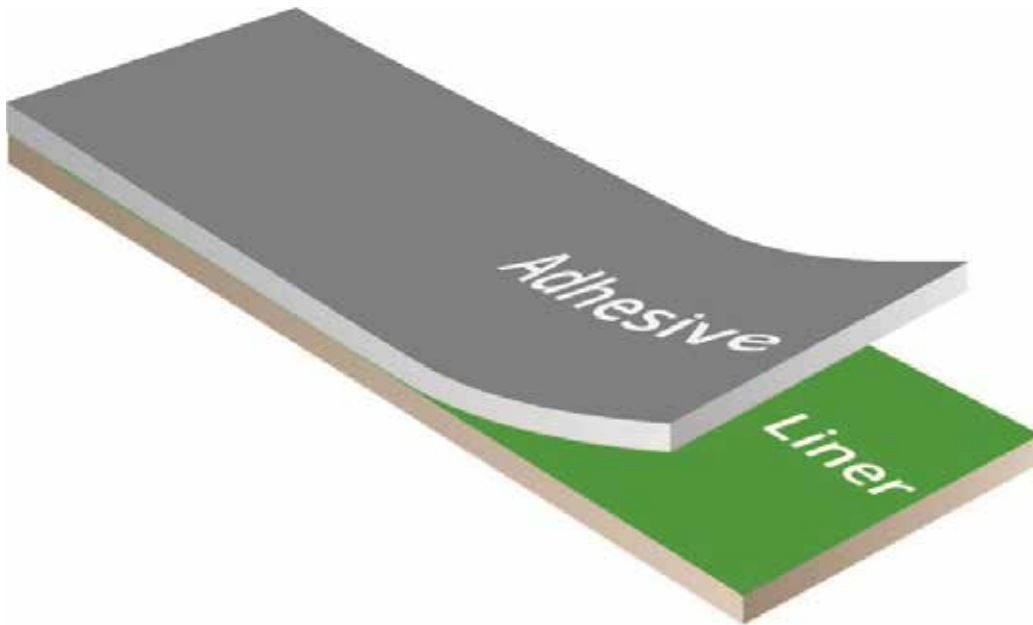

Adhesive: 6.2 mil transfer tape consisting of 1.2 mil of high performance adhesive to adhere to print side of second surface printed graphic overlays and 4 mil of high performance adhesive to adhere to a range of high and medium surface energy surfaces. Those adhesive layers are coated on each side of a 1 mil opaque polyester film.

Release Liner: Available with a 78# clay-coated kraft.



Adhesive Transfer Tape

TA5305 is a high-performance laminating adhesive designed for broad use. The adhesive exhibits an excellent balance of peel adhesion, tack, and shear strength, with good resistance to heat, humidity, UV light, and most chemicals.

Typical Applications

Overlays
Harsh Abrasion Environments

Typical Industry Sectors

Automotive
Electronics
Industrial



www.identco.com


TA5305


Adhesive Transfer Tape



Labels for Life.

Agency Recognitions

	Adhesion					
Stainless Steel	124 oz/in	1,352 n/m	Polycarbonate	123 oz/in	1,341 n/m	
Polypropylene	41 oz/in	447 n/m	ABS	151 oz/in	1,646 n/m	

	Material Caliper					
Adhesive - Layer 1	.0012"	30.5μ	Liner (kraft)	.0046"	116.8μ	
Opaque Polyester Layer	.001"	25.4μ	Total Material	.0108"	274.3μ	
Adhesive - Layer 2	.004"	101.6μ				

Exterior Durability

Recommended: Indoor or outdoor applications.

Temperature Range

Service Temperature: -40°F to 300°F (-40°C to 149°C)
Minimum Application Temperature: 32°F (0°C)

Shelf Life

Recommended Storage: 45-90°F (7-32°C) 20-75%R.H.
Shelf Life: 2 years @ recommended storage

Recommended Printing

Not printable

Process Durability

It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 07/03/18.

UNITED STATES HEADQUARTERS

28164 W. Concrete Drive,
Ingleside, IL 60041 USA
Phone: +1 (815) 385 - 0011
Fax + (815) 385 - 0359

MEXICO MONTERREY

Carretera a Laredo KM 16.5
Interior 14B Col. Moises Saenz
Apodaca, Nuevo Leon CP 66613
Phone: +51 (81) 8008 - 0438

EUROPE GERMANY

Güterbahnhofstraße 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0
Fax: +49 (6181) 440 830 - 99

ASIA HONG KONG

Unit 1708, 17/F, 9 Wing Hong St.
Cheung Sha Wan, Kowloon
Phone: +852 2959 2156
Fax: +852 2959 2019