


# TA6002



**Labels for Life.**

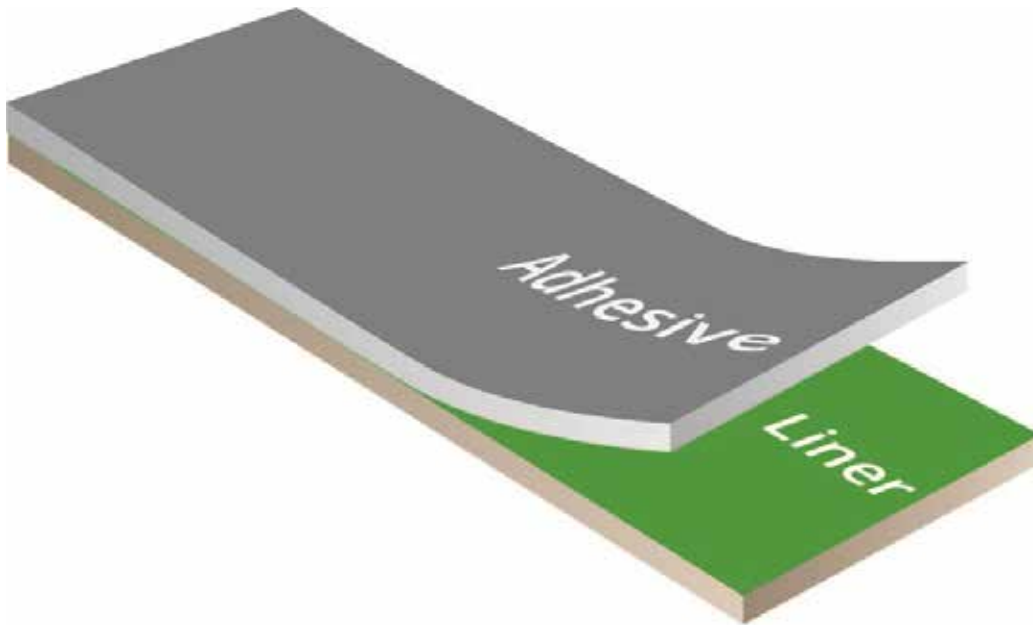

**Adhesive:** 2.0 mil acrylic adhesive designed for broad use, including highly textured powder-coated surfaces, LSE plastics, and low-fogging automotive applications.

**Release Liner:** 5 mil 78# densified kraft.



## Adhesive Transfer Tape

TA6002 is a high-performance laminating adhesive designed for broad use, including highly textured powder-coated surfaces, low-surface-energy plastics, and low-fogging automotive applications. It is coated with a high-performance acrylic adhesive, which exhibits an excellent balance of peel adhesion, tack, and shear strength, with good resistance to heat, humidity, UV light, and most chemicals.

## Typical Applications

- Nameplates
- Graphic overlays
- Labels
- Die-cut parts

## Typical Industry Sectors

- Automotive
- Electronics
- Industrial



[www.identco.com](http://www.identco.com)

# TA6002

## Adhesive Transfer Tape



Labels for Life.



### Adhesion

72-hour applied  
Stainless Steel  
Polypropylene

104 oz/in  
109 oz/in

1,134 n/m  
1,188 n/m

Polycarbonate  
ABS

118 oz/in  
131 oz/in

1,286 n/m  
1,428 n/m



### Material Caliper

Adhesive  
Liner (kraft)  
Total Material

.0020"  
.0050"  
.0070"

50.80μ  
127.04μ  
177.84μ



### Exterior Durability

Material only: Indoor use only.



### Temperature Range

Service Temperature: -40°F to 300°F (-40°C to 149°C)  
Minimum Application Temperature: 50°F (10°C)



### Shelf Life

Recommended Storage: 45-90°F (7-32°C) 20-75%R.H.  
Shelf Life: 2 years @ recommended storage



### Recommended Printing

Non-printable material.



### Process Durability

It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 06/25/18.

#### UNITED STATES HEADQUARTERS

28164 W. Concrete Drive,  
Ingleside, IL 60041 USA  
Phone: +1 (815) 385 - 0011  
Fax + (815) 385 - 0359

#### MEXICO MONTERREY

Carretera a Laredo KM 16.5  
Interior 14B Col. Moises Saenz  
Apodaca, Nuevo Leon CP 66613  
Phone: +51 (81) 8008 - 0438

#### EUROPE GERMANY

Güterbahnhofstraße 3-7  
63450 Hanau  
Phone: +49 (6181) 440 830 - 0  
Fax: +49 (6181) 440 830 - 99

#### ASIA HONG KONG

Unit 1708, 17/F, 9 Wing Hong St.  
Cheung Sha Wan, Kowloon  
Phone: +852 2959 2156  
Fax: +852 2959 2019